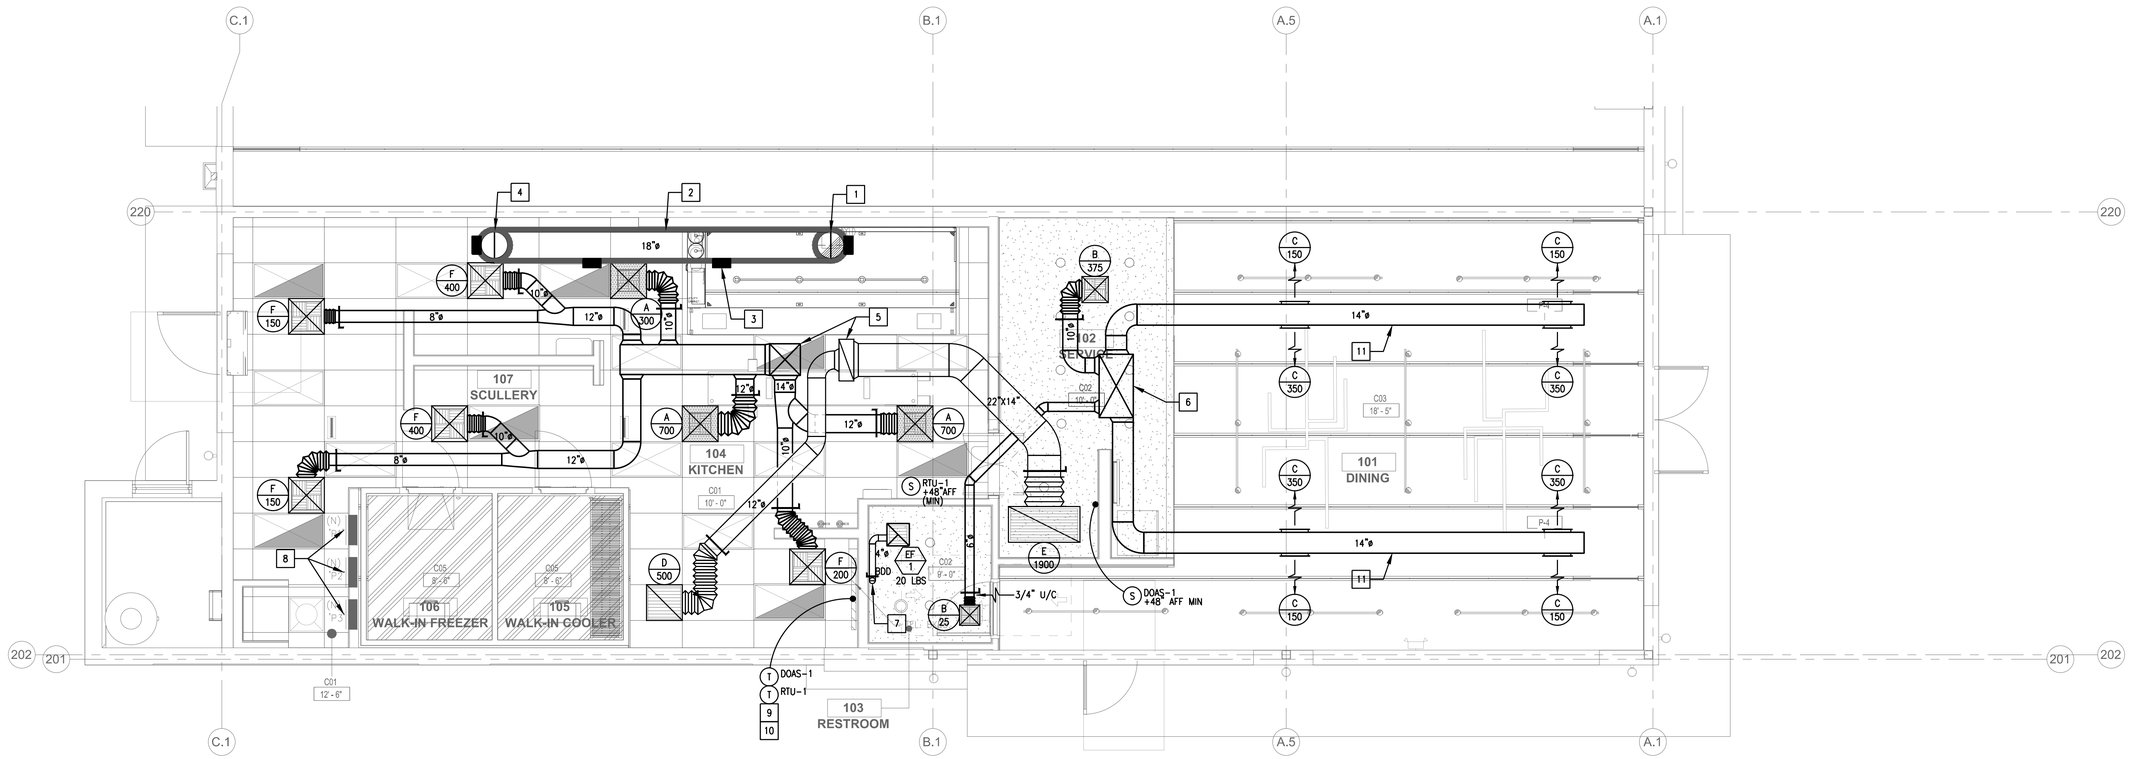

MECHANICAL FLOOR PLAN

SCALE 1/4"=1'-0"

1

GENERAL NOTES

1. ALL GREASE EXHAUST DUCTWORK SHALL BE DOUBLE-WALL FACTORY BUILT GREASE DUCT FOR USE WITH TYPE I KITCHEN HOOD THAT CONFORMS TO THE REQUIREMENTS OF NFPA-96. PRODUCT SHALL BE ETL LISTED TO UL-1978 & UL-2221.
2. ANY CHANGES MADE TO THE DESIGN IDENTIFIED ON THESE DRAWINGS AND/OR ASSOCIATED SPECIFICATIONS SHALL BE SUBMITTED TO THE ENGINEER/ARCHITECT OF RECORD FOR REVIEW AND APPROVAL PRIOR TO MAKING ANY MODIFICATIONS TO THE PROJECT. ANY LIABILITY AS A RESULT OF DESIGN MODIFICATIONS, AS WELL AS ANY COST ASSOCIATED WITH SUCH MODIFICATIONS, MADE WITHOUT THE WRITTEN APPROVAL OF THE ENGINEER/ARCHITECT OF RECORD SHALL BECOME THE RESPONSIBILITY OF THE CONTRACTOR.
3. PROVIDE MANUAL VOLUME DAMPERS AT ALL BRANCH DUCTS. PROVIDE CABLE/ ELECTRONIC VOLUME DAMPERS AT ALL IN-ACCESSABLE CEILING LOCATIONS.
4. DUCT DIMENSIONS ON PLAN ARE SHEET METAL SIZE.
5. ALL CEILING DIFFUSER AND RETURN AIR REGISTER CEILING BOXES SHALL BE OF SUFFICIENT HEIGHT TO PERMIT SIDE INLET DUCT CONNECTIONS WHEN ATTACHED TO BRANCH DUCTS, OR FULL SIZE VERTICAL PLENUMS WHEN CONNECTED DIRECTLY OFF BOTTOM OF SA OR RA MAINS. SUCH CEILING BOXES AND VERTICAL PLENUMS SHALL BE LINED W/ 1" THICK NFBU RATED DUCT LINER WITH FLAT BLACK FACING. CONNECTION TO SIDEWALL SUPPLY REGISTERS SHALL BE MADE WITH FULL SIZE HORIZONTAL PLENUM EXTENSIONS FROM MAIN SUPPLY DUCT, LINED OR WRAPPED AT CONTRACTORS OPTION
6. CONTRACTOR TO PROVIDE ALL CONTROL ACCESSORIES AND COORDINATE WITH ALL TRADES AND PROVIDE MINIMUM CLEARANCE FOR ALL EQUIPMENT.
7. CONTRACTOR TO VERIFY ALL EXISTING CONDITIONS BEFORE START OF ANY WORK.
8. CONTRACTOR TO PROVIDE NECESSARY CONTROL DEVICES TO ENSURE THE SYSTEM FUNCTIONS PROPERLY.
9. FACTORY BUILT GREASE DUCT SHALL BE PROVIDED BY KEC AND INSTALLED BY MECHANICAL CONTRACTOR.
10. IF EXISTING DUCTWORK IS REUSED, CONTRACTOR SHALL INCLUDE PRICING TO PROFESSIONALLY CLEAN THE DUCT SYSTEM AS PART OF THEIR BASE BID.
11. HOOD HAS MINIMUM OF 6" OVERHANG ALL AROUND COOKING EQUIPMENT.
12. PROVIDE CLEAR THERMOSTAT LOCKABLE BOX.
13. REMOTE TEST INDICATORS (RTI) FOR SMOKE DETECTOR. LABEL CLEARLY MATCHING THE UNIT ITS BEING SERVED NEXT TO ITS THERMOSTAT.

PLAN NOTES

1. 18"ø STAINLESS STEEL DOUBLE WALL FACTORY BUILT GREASE DUCT INTO HOOD (2,800 CFM @ 1,584 FPM)
2. STAINLESS STEEL DOUBLE-WALL FACTORY BUILT GREASE DUCT. THE SLOPE OF THE HORIZONTAL DUCT SHALL NOT BE LESS THAN THE MANUFACTURER'S INSTALLATION INSTRUCTION (SLOPE SHALL BE 1/16" PER LINEAR FOOT FOR HORIZONTAL DUCT RUN LESS THAN 75', AND 3/16" PER LINEAR FOOT FOR HORIZONTAL DUCT RUN MORE THAN 75': PER CAPTIVEAIRE DOUBLE WALL GREASE EXHAUST AIR DUCT INSTALLATION INSTRUCTION) TOWARD THE HOOD OR TOWARD THE APPROVED GREASE RESERVOIR.
3. CLEAN-OUT ACCESS DOORS AT EVERY 12'-0" O.C. AND AT EACH CHANGE OF DIRECTION FOR ALL HORIZONTAL GREASE DUCT.
4. 18"ø STAINLESS STEEL DOUBLE WALL FACTORY BUILT GREASE DUCT UP TO ROOF (2,800 CFM @ 1,584 FPM) - SEE M3.0 FOR CONTINUATION.
5. SUPPLY AND RETURN AIR DUCT AND UP TO RTU-1 - SEE M3.0 FOR CONTINUATION.
6. SUPPLY AND RETURN AIR DUCT AND UP TO DOAS-1 - SEE M3.0 FOR CONTINUATION.
7. 4"ø RESTROOM EXHAUST AIR DUCT UP TO ROOF TERMINATE WITH FACTORY ROOF CAP (80 CFM) - SEE M3.0 FOR CONTINUATION.
8. NO DUCTS AND PIPING TO RUN ABOVE ELECTRICAL PANELS AND TRANSFORMERS PER NEC REQUIREMENTS, SEE CONSTRICTION NOTE #42 ON M1.0.
9. PROVIDE REMOTE TEST INDICATORS (RTI) FOR SMOKE DETECTOR NEXT TO ITS THERMOSTAT. LABEL CLEARLY MATCHING THE UNIT ITS BEING SERVED.
10. THERMOSTAT SHALL BE HONEYWELL T10+. THERMOSTAT SHALL BE PRE-SET AT 72°F AND THE AC SHALL OPERATE FROM 10AM TO 12AM. PROVIDE WITH CLEAR PLASTIC THERMOSTAT COVER.
11. ALL EXPOSED DUCT IN DINING AREA SHALL BE PAINTED PER ARCHITECTURE DRAWINGS.

RSI GROUP
3199 AIRPORT LOOP DR. SUITE D
COSTA MESA, CA 92626
714.966.9400
WWW. rsi-group.com

COMMONWEALTH OF VIRGINIA
SANYA PHATCHARAKITTI
Lic. No. 0402065627
PROFESSIONAL ENGINEER
SANYA PHATCHARAKITTI, License #0402065627
Expiration Date: 09/30/2026

CRO ENGINEERING GROUP, INC.
Mechanical | Electrical | Plumbing
17151 NEWHOPE STREET, SUITE 108
FOUNTAIN VALLEY, CALIFORNIA 92708
PHONE: 714-847-7100 WWW.CROEG.COM

DAVE'S HOT CHICKEN

DO NOT SCALE DRAWINGS CONTRACTOR TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS - NOTIFY ARCHITECT OF ANY DISCREPANCIES PRIOR TO BEGINNING CONSTRUCTION

PROJECT NAME:

DHC MIDLOTHIAN
MIDLOTHIAN TURNPIKE & ALVERSER DRIVE
MIDLOTHIAN, VA 23223

ISSUE DATE:

90% REVIEW - 09/05/2025
ISSUED FOR PERMIT - 09/23/2025

MECHANICAL FLOOR PLAN

M2.0

DATE OF PRINTING - 9/23/2025

DWG: S:\clients\197-RSI Group\197-142-DHC, Midlothian Depot, VA\Mechanical\197142-M2.0.dwg USER: monsyp
DATE: Sep 23, 2025 12:02pm XREFS: x197142-TBLK-M x197142-RCP PLAN x197142-BASEPLAN x197142-ELEC EQUIP IMAGES: DHC-LOGO.png RSI-BLK-LOGO.png